

Communications & Power Industries CW Magnetron

A high output power 125 kW L-band CW magnetron that delivers 125 kW minimum continuous output power at typical 88% efficient operation


FEATURES:

- 896, 915, 922 & 929 MHz
- CW Power Output – 125 kW*
- 88% efficiency, typical
- Water-cooled anode
- Coaxial launch into WR-975
- External electromagnet

Specifications

Frequency of operation (fixed)	896, 915, 922, 929 MHz
Frequency variation	±10 MHz
Continuous CW power output power*	125 kW min
Anode Voltage	20.5 – 21.5 kV
Anode current	6.6 – 7.3 A
Efficiency	83 – 88%
Filament voltage	12.0 – 12.6 V
Filament current	112 – 115 A (see chart)
Load VSWR (circulator required)	1.1:1

*For operation at power levels below 75kW, contact Econco for operating instructions.

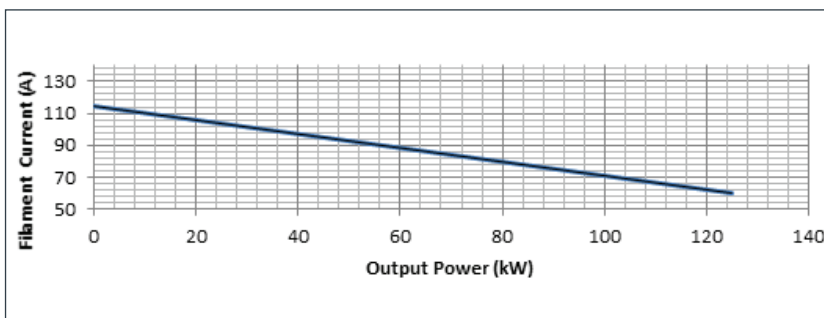


Cooling Requirements

Cooling (water flow, anode min.)	4 gpm
Cooling (air flow, cathode min.)	5 cfm
Cooling (air flow, dome min.)	40 cfm

Mechanical

RF Launch type	Coaxial, into WR-975
Weight (maximum)	15 lbs (6.81 Kg)
Overall dimensions:	
Length	18 inches (45.72 cm)
Diameter	4.94 inches (12.55 cm)

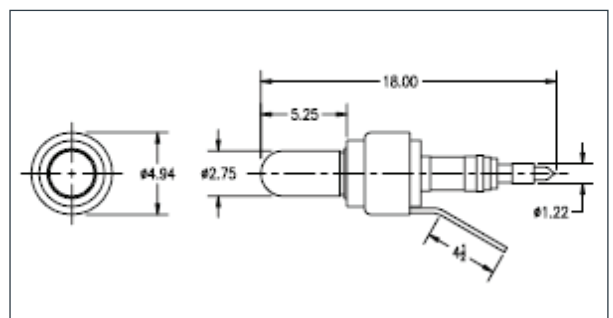

Econco Division
 1318 Commerce Avenue
 Woodland, California
 USA 95776-5908

tel +1 800-532-6626
 +1 530-662-7553
 email Econco-Sales@cpii.com
 web www.cpii.com

For more detailed information, please refer to the corresponding CPI technical description if one has been published, or contact CPI. Specifications may change without notice as a result of additional data or product refinement. Please contact CPI before using this information for system design.

©2020 Communications & Power Industries LLC. Company proprietary: use and reproduction is strictly prohibited without written authorization from CPI.